Notes:

1. ELECTRICAL:
   A. IMPEDANCE:50 OHM
   B. FREUENCY RANG:DC-11GHz
2. ENVIRONMENT:
   A. TEMP RANGE:-55°C TO +155°C
   B. RoHS COMPLIANT

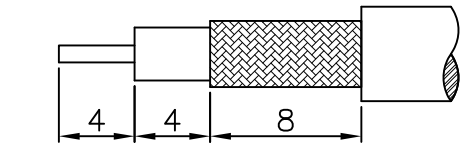

RECOMMENDED CABLE STRIPPING DIM'S

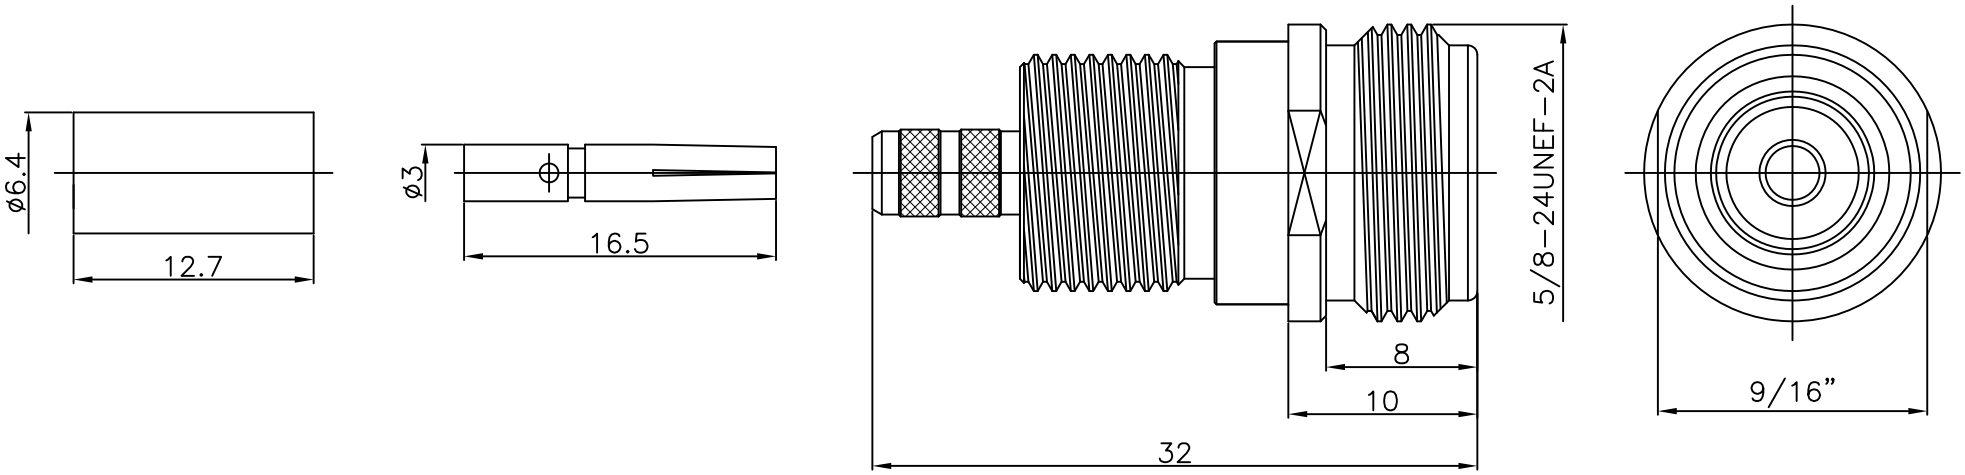

1.CRIMPED CONTACT PIN HEX CRIMP SIZE 1.69(RCT-58S)
2.CRIMPED FERRULE HEX CRIMP SIZE 5.41(RCT-58S)

NO.	NAME	MATERIAL	FINISH	Q.TY
⑤	FERRULE	BRASS	NICKEL	1
④	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
③	CRIMP	BRASS	NICKEL	1
②	INSULATOR	PTFE	NATURAL	1
①	BODY	BRASS	NICKEL	1

DIMENSIONS ARE IN MILLIMETERS UNLESS STATED OTHERWISE.
TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

SIZE	APPROVALS		DATE
5 : 2			
UNIT	DRAW	Serena H	081716
mm	CHECK	Nico L	081716
PROJECT	APPROVE	River H	081716

TITLE	N CRIMP JACK (FOR RG-58/U, 141/U, 303/U)		
MODEL	N-S3711107R4	REV.	S
DWG No	N-100CDR	REV.	

PULSE CONNECTORS